

# PowerLogic™ PM8000 series

Simplifying power quality,  
maximizing versatility

These compact meters help ensure the reliability and efficiency of your facility by making the management of power quality, availability, and reliability easy. Measure, understand, and act on insightful power and energy data gathered from your entire system. The PM8000 has the versatility to perform nearly any job you need a meter to do, wherever you need it!

## Address power issues before they cause problems

- Monitor harmonics to mitigate excessive heating and premature failure of transformers
- Use trending and alarming to detect fluctuations in current pull of critical equipment to prevent motor failure
- Utilize millisecond time stamping to analyze sequence of events
- Identify root cause by analyzing electrical faults with patented disturbance direction detection
- Identify power quality issues per EN 50160, including frequency inconsistency, voltage fluctuations and unbalance, and harmonic contribution
- Allocate costs for water, air, gas, electricity, and steam (WAGES) across departments, phases of industrial process, or cost centers
- Utilize time-of-use calendar to capture electrical consumption for specific times, including on/off peak and holidays

## The best choice for power management

The PM8000 series is highly accurate, extremely reliable, and unmatched in flexibility and usability. Compliant with stringent international standards that guarantee accuracy, these meters are ideal for industrial and critical power facilities.


PM8000 meters combine accurate 3-phase energy and power measurements with data logging, power quality analysis, alarming and I/O capabilities not typically available in such compact meters. Patented technology combines convenient, pre-configured functionality with the ability to customize the meter configuration to meet unique requirements. This embedded capability can save the expense and complexity of additional equipment, both today and tomorrow. Plus, simple installation and networking make energy

information quickly accessible, while integration with EcoStruxure™ software and your energy management system make it immediately actionable.



## Your power monitoring workhorse

- Reveal and understand complex power quality conditions
- Gather and act on facility-wide energy and consumption data
- Integrate easily with energy management systems
- Protect your investment with adaptable ION™ technology

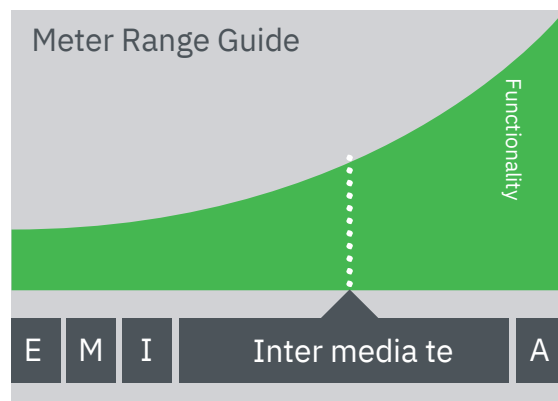

- Network management and power quality
- Feeders and critical loads

Key:	E Entry	I Intermediate
	M Multicircuit	A Advanced
	B Basic	

## PM8000 series features

Intermediate meter			
General			
Use on LV and MV systems			
Current accuracy (5A Nominal)			0.1 % reading
Voltage accuracy (57 V LN/100 V LL to 400 V LN/690 V LL)			0.1 % reading
Active energy accuracy			0.2 %
Number of samples/cycle or sample frequency			256
Instantaneous rms values			
Current, voltage, frequency			
Active, reactive, apparent power	Total and per phase		
Power factor	Total and per phase		
Current measurement range (autoranging)			0.05 - 10A
Energy values			
Active, reactive, apparent energy			
Settable accumulation modes			
Current			
Active, reactive, apparent power	Present and max. values		
Predicted active, reactive, apparent power	Present and max. values		
Synchronization of the measurement window			
Setting of calculation mode	Block, sliding		
Power quality measurements			
Harmonic distortion	Current and voltage		
Individual harmonics	Via front panel and web page		63
Waveform capture	Via StruxureWare software		127
Detection of voltage swells and sags			
Fast acquisition			
EN 50160 compliance checking			
Customizable data outputs (using logic and math functions)	1/2 cycle data		
Min/max of instantaneous values			
Data logs			
Event logs			
Trending/forecasting			
SER (Sequence of event recording)			
Time stamping			
GPS synchronization (+/- 1 ms)			
Memory (in Mbytes)			
Front panel display			512
Wiring self-test			
Pulse output			
Digital or analog inputs(max)			
			1
			27 digital 16 analog
Digital or analog outputs (max, including pulse output)			1 digital 8 relay 8 analog
Communication			
RS 485 port			1
Ethernet ports			2
Serial port (Modbus, ION, DNP3)			
Ethernet port (Modbus/TCP, ION TCP, DNP3 TCP, DHCP, DNS, IPv4, IPv6, IEC 61850)			
Ethernet gateway			
Alarm notification via email			
HTTP web server with waveform viewer			
SNMP with custom MIB and traps for alarms			
SMTP email			
PTP and NTP time synchronization			
FTP file transfer			



- Four-metered current inputs allow direct measurement of 3-phase currents and neutral current for enhanced view of harmonics
- Modular, field installable I/O architecture for scalability
- Dual Ethernet ports support daisy-chaining, removing need for an Ethernet switch inside power equipment, while redundant ring topology provides enhanced availability

Learn more at  
[www.schneider-electric.us /  
 power monitoring](http://www.schneider-electric.us/powermonitoring)

Let us help you simultaneously maximize power reliability, availability, and quality, as well as improve operational and cost efficiency for your entire enterprise with a fully integrated power management solution.

*As standards, specifications and designs develop from time, always ask for confirmation of the information given in this publication.*

Schneider Electric  
 6700 Tower Circle  
 Suite 700  
 Franklin, TN 37067  
 1-888-797-6468

[www.schneider-electric.us/powerandenergy](http://www.schneider-electric.us/powerandenergy)

Life Is On

**Schneider**  
 Electric